


**DO NOT TEST ONE LIGHT FIXTURE AT A TIME!**

**FIXTURE INSTALLATION:**

- 1. OUTFIT LIGHT FIXTURES WITH BULLET CONNECTIONS**
  - a. RED (+) WITH A MALE BULLET CONNECTOR**
  - b. BLACK (-) WITH A FEMALE BULLET CONNECTOR**
- 2. DRILL 1-1/8" HOLE**
- 3. INSERT BRACKET**
  - a. IF DRYWALL OR OTHER POROUS MATERIAL**  
APPLY A LAYER OF SILICON TO KEEP BRACKET IN PLACE
- 4. RETRIEVE WIRES IN CEILING AND OUTFIT WITH BULLET CONNECTIONS**
  - a. SIDE OF THE WIRE CLOSER TO THE LED DRIVER**  
SHOULD BE FITTED WITH A FEMALE BULLET CONNECTOR
  - b. SIDE OF THE WIRE FARTHER FROM THE LED DRIVER**  
SHOULD BE FITTED WITH A MALE BULLET CONNECTOR
- 5. CONNECT FIXTURE**
- 6. PUSH WIRES INTO CEILING**
- 7. PUSH FIXTURE INTO BRACKET UNTIL FLUSH WITH CEILING**

### 0-10v DIMMER SWITCH INSTALLATION:

- 1. FOR DIMMING A 0-10V DIMMER MUST BE USED**
- 2. WIRE SWITCHES AS SHOWN**
  - a. WIRES NOT UTILIZED MUST BE CAPPED INDIVIDUALLY**
- 3. IF DIMMING FUNCTION OF LED DRIVER IS NOT BEING UTILIZED CAP GREY AND PURPLE WIRES INDIVIDUALLY**

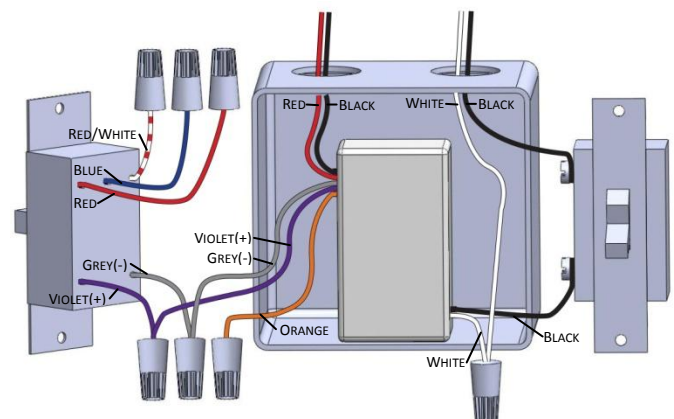

**DO NOT TEST ONE LIGHT FIXTURE AT A TIME!**