


SUNSTRIP 40 INSTALLATION GUIDE (one dimmer for multiple drivers)

Components check list:

1. One 48" Sunstrip40
2. One 24" Sunstrip40
3. Two white male connectors
4. Swivel endcaps (not for magnet mount option)
5. One RSLD70-14 power supply
6. One RSLD35-15 power supply
7. One 0-10V dimmer

Wiring Diagram (One dimmer controls multiple LED drivers) 4

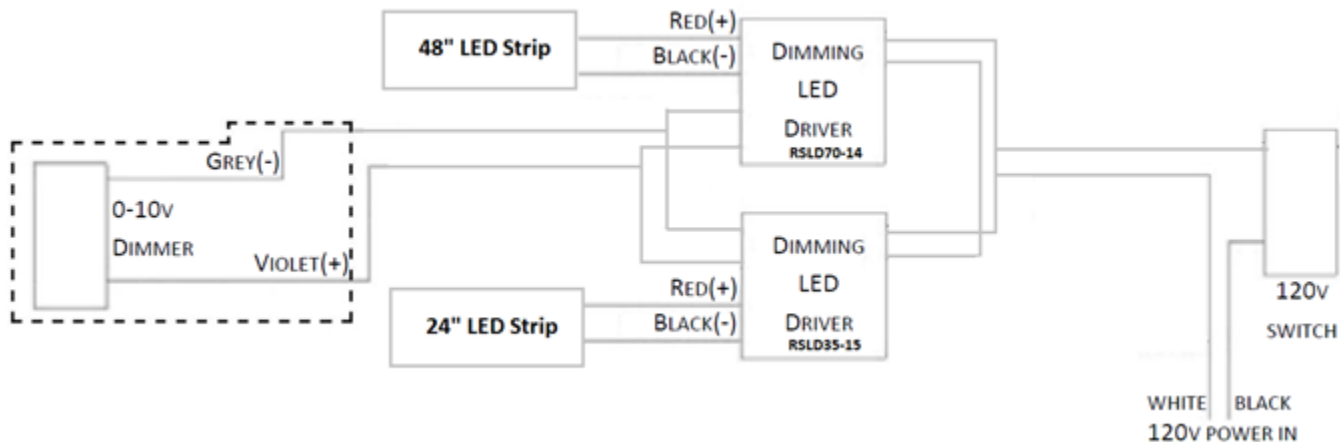

Notes:

1. The 0-10V dimmer may only have the grey and violet wires.
2. AC on/off switch is for completely turning off the power, the AC on/off switch is not included, it is available at hardware stores like Home Depot.
3. **RSLD70-14 can only be used with 48" LED strip. It will burn the 24" LED strip.**
4. **RSLD35-15 can only be used with 24" LED strip. It won't power the 48" LED Strip.**

Dimmer Switch Installation:

1. Wires not utilized must be capped individually.
2. If dimming function of LED driver is not being utilized, cap grey and purple wires individually.

