


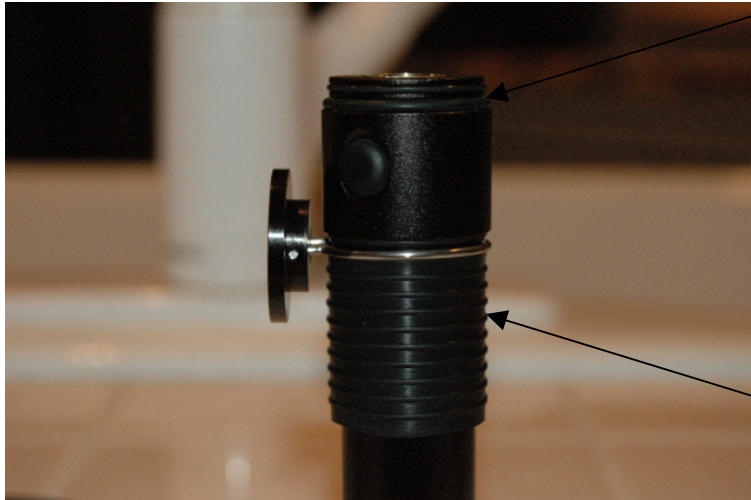

Option2: replace this rubber o-ring with the side magnet ring

Option1: use the rubber sleeve to push against the side magnet ring

Option 1: use the rubber sleeve to push against the side magnet ring.

Option 2: replace this rubber o-ring with the side magnet ring.

If you choose Option 2, here is the **Instruction of installation:**

Step 1, Take off the two O-rings

Step 2, Lay the ring on a hard and flat surface, push the housing against the ring and the flat surface, so that the ring will barely stay on the switch unit.

Step 3, Push the ring further down by using a right size tube (inner diameter 25mm to 27mm), or just use our Eagle end cap if you have. Using a hammer if necessary.